



24" Gas Built-In Self-Cleaning Single Wall Oven


PRODUCT MODEL NUMBERS

SB160PEE


Gas supply: Use 3/4" rigid pipe gas supply line to the range location. A smaller size pipe on long runs may result in insufficient gas supply. With L.P. gas, piping or tubing size can be 1/2" minimum. If local codes permit, it is recommended that new flexible metal tubing, design-certified by AGA or CSA, 4-5 feet long, 1/2- or 3/4-inch I.D., be used for connecting the range to the rigid gas supply line. A 1/2" male pipe thread is needed for connection to pressure regulator female pipe threads. An individual manual shutoff valve must be located in the same room, but external to the range.

Electrical: A four-wire or three-wire, single phase, 120-volt, 60-Hz, AC-only, electrical supply is required on a separate 15-ampere circuit, fused on both sides of the line. A time-delay fuse or circuit breaker is recommended.

OVERALL DIMENSIONS

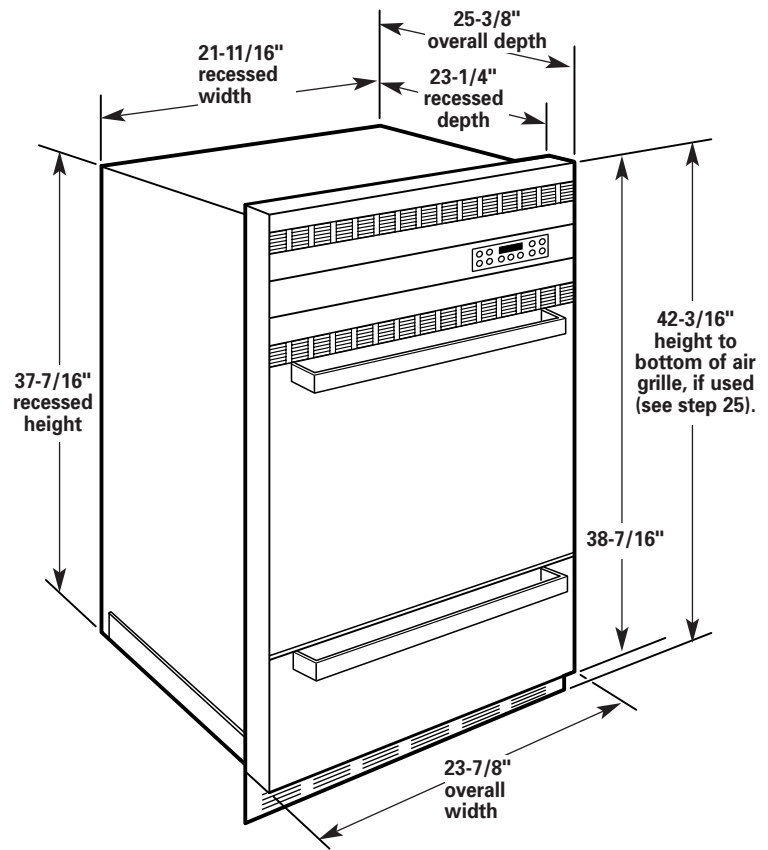

CABINET OPENING DIMENSIONS

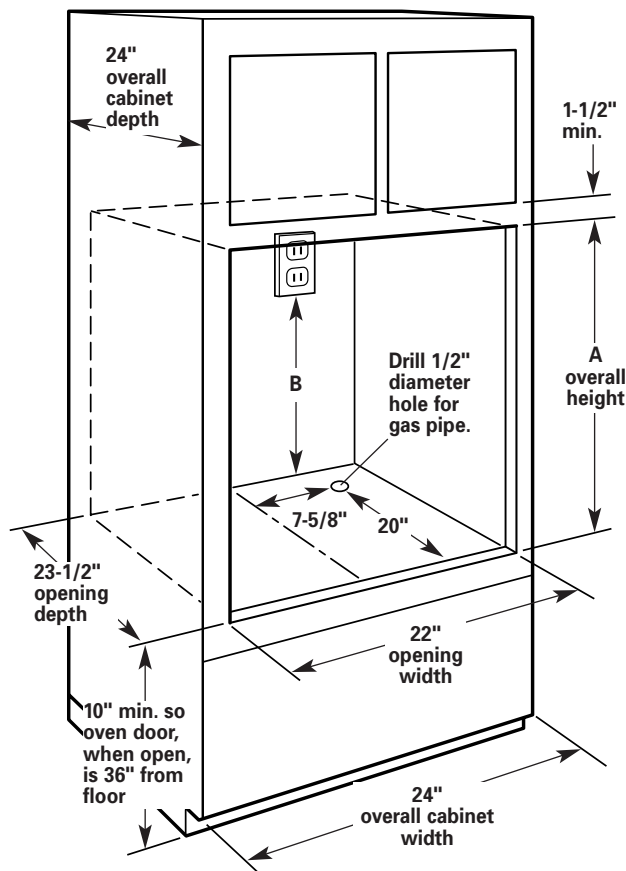

A overall height	B	Adjustment instructions
37-1/2"	27"	None
38" to 39"	27"	See Step 7a, Page 4
39-1/8" to 42"	37-1/2"	See Step 7b, Page 4