

Side by Side Refrigerator


PRODUCT MODEL NUMBERS

ED2FHEXN	ED5LHGXM
ED2GHEXN	ED5NHEXM
ED2NHGXM	ED5NHGXM
ED2PHEXN	ED5PHEXN
ED2VHGXM	ED5RHEXN
ED5FHEXM	ED5RHGXM
ED5FHEXN	ED5VHGXM
ED5FHGXN	
ED5GHEXN	
ED5GTGXN	

Electrical: A 115 Volt, 60 Hz., AC only 15 or 20 amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water line with water pressure between 30 and 120 psi is required for the water dispenser and ice maker.


OVERALL DIMENSIONS

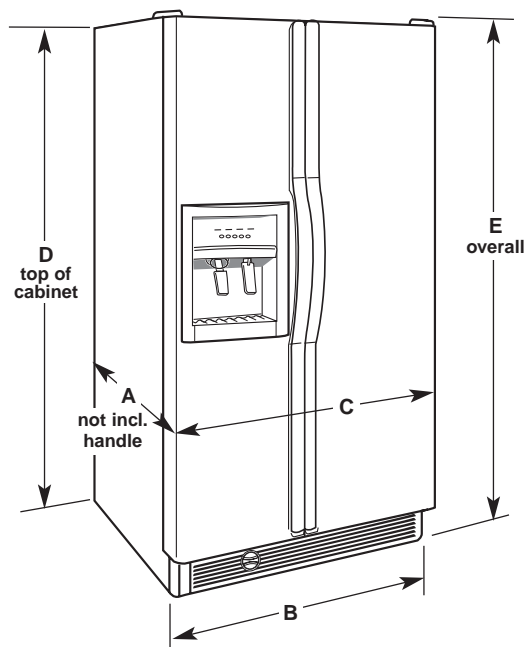

Dimensions "D" and "E" include rollers extended 3/4".

Model size	Depth "A"	Cab. Width "B"	Door Width "C"	Cab. Height "D"	Overall Height "E"
22 cu.ft.	31 3/8"	32 3/4"	33 1/8"	65 7/8"	66 3/4"
25 cu.ft.	31 3/8"	35 1/2"	35 7/8"	68 7/8"	69 3/4"
27 cu.ft.	32 1/4"	35 1/2"	35 7/8"	68 7/8"	69 3/4"

LOCATION REQUIREMENTS

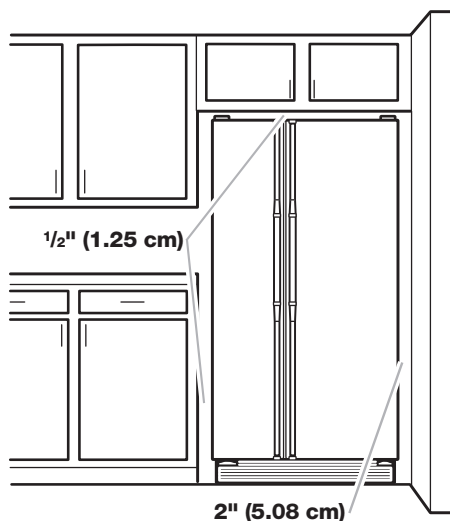

To ensure proper ventilation for your refrigerator, allow for 1/2 in. (1.25 cm) space on each side and at the top. (At the top, when using half depth cabinet, use top of cabinet height "D" dimension. When using full depth cabinet, use overall "E" dimension.) When installing your refrigerator next to a fixed wall, leave 2 in. (5.08 cm) minimum on each side (depending on your model) to allow for the door to swing open. If your refrigerator has a water dispenser and ice maker, allow extra space at the back for the water line connections.

NOTE: Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).