

Undercounter Dishwasher


PRODUCT MODEL NUMBERS

UDT555SAFP

Minimum Clearances

NOTES:

- Corner locations require 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.
- A minimum of 25⁵/₈" (65.1 cm) is required in front of the dishwasher to allow the door to open fully.
- Opening should be square, and the floor should be level.

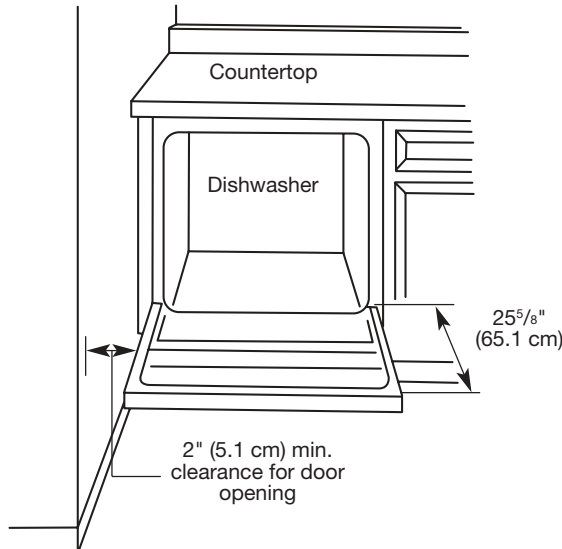

Electrical Requirements

- 120 volt, 60 Hz, AC-only, 15 or 20 amp., fused electrical supply
- Copper wire only, 2-wire with ground

Recommended:

- Time-delay fuse or circuit breaker
- Separate circuit

Drain Requirements

- Use the new drain hose supplied with your dishwasher.


NOTE: If a longer drain hose is required:

- Use a new drain hose with maximum length of 10 ft (3 m) that meets all current AHAM/IAPMO test standards.
- Use a new drain hose that is resistant to heat and detergent.
- Use a new drain hose that fits the 1" (2.5 cm) drain connector on the dishwasher.
- Connect drain hose to waste tee or disposal inlet above drain trap in house plumbing.
- Connect drain hose to house plumbing 20" (50.8 cm) minimum above the floor.

NOTE: It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter, or be connected to an air gap.

- Use an air gap if the drain hose is connected to house plumbing lower than 18" (45.7 cm) above the subfloor or floor.

Drain Air Gap

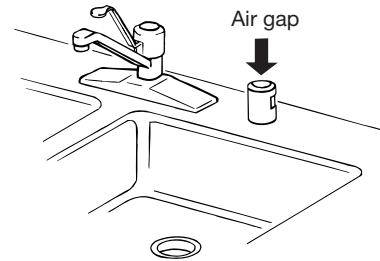

- Use 1/2" minimum I.D. drain line fittings.

NOTE: Do not connect drain lines from other devices to the dishwasher drain hose.

Water Supply Requirements


- A hot water line with 20-120 psi (138-862 kPa) water pressure.
- 120°F (49°C) water at dishwasher.
- 3/8" O.D. copper tubing with compression fitting or flexible stainless steel braided fill line

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with 3/8" N.P.T. external pipe threads on one end.


IMPORTANT: Do not solder within 6" (15.2 cm) from water inlet valve.

Product Dimensions

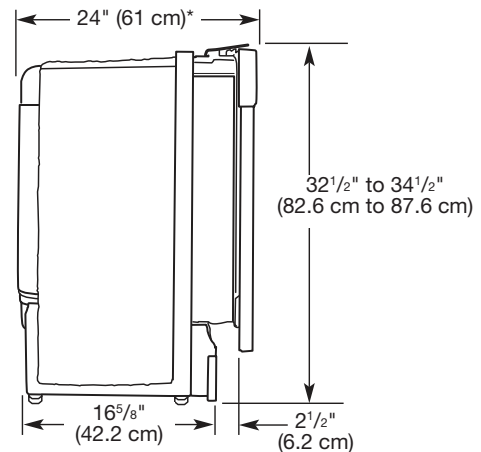

*To front of door frame

SIDE VIEW

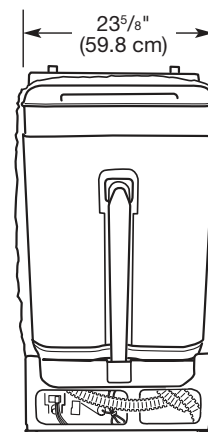

REAR VIEW

Cabinet Cutout Dimensions



- Cut holes in shaded area of cabinet walls or floor for plumbing and electrical service.
- ADA installation, 32½" (82.5 cm) beneath 34" (86.4 cm) high countertops may be accomplished by adjusting the toekick and leveling legs.

Custom Panel Dimensions and Installation

Technical drawing showing the dimensions of a rectangular plate. The overall dimensions are 26.78" (68.0 cm) by 23.39" (59.4 cm). A central hole has a diameter of 12- ϕ 0.08" (0.20 cm) and a depth of 0.40" (0.10 cm). The distance from the top edge to the center of the hole is 21.26" (54.0 cm). The distance from the left edge to the center of the hole is 22.36" (56.8 cm). The distance from the bottom edge to the center of the hole is 10" (25.4 cm). The distance from the right edge to the center of the hole is 9.84" (25.0 cm). The thickness of the plate is 0.59" (1.5 cm).

Install the hook on the custom panel and insert the hook into the slot on the outer door of the dishwasher. After positioning the panel, attach the panel to the outer door with screws and bolts.